

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 073 136 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

31.01.2001 Bulletin 2001/05

(51) Int. Cl.⁷: **H01M 4/48**, H01M 4/50

(21) Application number: **00115415.2**

(22) Date of filing: **17.07.2000**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: **30.07.1999 JP 21679499**

(71) Applicant: **NGK INSULATORS, LTD.**

Nagoya-City, Aichi Prefecture 467-8530 (JP)

(72) Inventor:

Takahashi, Michio,

Grand-heights

Nagoya-city, Aichi-prefecture, 467-0027 (JP)

(74) Representative:

**Leson, Thomas Johannes Alois, Dipl.-Ing. et al
Patentanwälte**

Tiedtke-Bühling-Kinne & Partner,

Bavariaring 4

80336 München (DE)

(54) **Lithium secondary battery**

(57) A lithium secondary battery using lithium manganese oxide as an positive active material and excellent for charge and discharge cycle property.

As an positive active material of lithium secondary battery, lithium manganese oxide having a cubic spinel structure, in which the strength ratio (P_2/P_1 strength ratio) of the primary endothermal peak (P_1) appearing around 950°C and the secondary endothermal peak (P_2) appearing around 1100°C in differential thermal analysis is under 1, is used.

EP 1 073 136 A2

Description

Background of the Invention and Related Art Statement

[0001] The present invention relates to a lithium secondary battery, of which positive active material is lithium manganese oxide, excellent for charging and discharging cycle property.

[0002] In recent years, miniaturization and reduction of weight has been accelerated for such portable electronic instruments as a portable phone, a VTR, and a note-type PC. As a cell for electric power source, a secondary battery, in which a complex oxide made of lithium and a transition element, carbon material, and an organic electrolyte solution prepared by dissolving an Li ion electrolyte in an organic solvent are used for the positive active material, negative active material, and the electrolyte, respectively, is being used.

[0003] Such battery is normally named as lithium secondary battery or lithium ion battery and has features of a high energy density and a high single-cell voltage as about 4 V. Thus, the lithium secondary battery attracts an attention as an electric power source of not only said portable electronic instruments, but also electric vehicle (hereafter, EV) or hybrid electric vehicle (hereafter HEV) which is positively intended to popularize to public as a low pollution automobile on the basis of the latest environmental problems.

[0004] In such lithium secondary battery, cell capacity and charge and discharge cycle property (hereafter, cycle property) largely depend on material characteristics of positive active material used. Here, the complex oxide made of lithium and a transition element used as the positive active material is specifically exemplified by lithium cobalt oxide (LiCoO_2), lithium nickel oxide (LiNiO_2), and lithium manganese oxide (LiMn_2O_4) or the like.

Summary of the Invention

[0005] Among them, lithium manganese oxide spinel (stoichiometric composition: LiMn_2O_4) has features of a low raw-material cost, a large output density, and a high electric potential. On the other hand, the following is a problematic defect: discharge capacity gradually decreases as charge and discharge cycles are repeated, thus it is difficult to yield a good cycle property.

[0006] Li ions are released from the positive active material or inserted in the positive active material by charge or discharge. Here, crystalline structural change of the positive active material becomes irreversible. Thus, a part of Li ions do not contribute to battery reaction after a repeat of charge and discharge cycles. This may be a major cause of a reduction in discharge capacity.

[0007] Therefore, the inventors carried out various studies to intend to stabilize the crystal structure of lithium

manganese oxide spinel. As a result, we found that the cycle property is improved when lithium manganese oxide spinel having a given thermal property is used for the positive active material. We have established a manufacturing method for lithium manganese oxide spinel having such a thermal property.

[0008] The present invention provides a lithium secondary battery, characterized in that lithium manganese oxide is used as an positive active material having a cubic spinel structure of which strength ratio (P_2/P_1 strength ratio) of a primary endothermal peak (P_1) appearing around 950°C and a secondary endothermal peak (P_2) appearing around 1100°C in differential thermal analysis is under 1.

[0009] Here, it is more preferable that said strength ratio is lower than 0.5. It is also preferable that Li/Mn ratio is over 0.5 in lithium manganese oxide. Such lithium manganese oxide can be yielded by firing a mixture of salt and/or oxide of respective elements adjusted to a given proportion in an oxidation atmosphere, under a temperature in the range of 650 to 1000°C , and for a duration between 5 hours and 50 hours. In such a manufacturing method, firing is preferably carried out twice or more. Preferably, firing temperature is gradually increased as the number of times of firing increases.

Brief Description of the Drawings

[0010]

Fig. 1(a) is a graph showing the result of thermal analysis for Example 1 and Fig. 1(b) is for the Comparative Example, respectively.

Detailed Description of Preferred Embodiment

[0011] In the lithium secondary battery according to the present invention, lithium manganese oxide, which has a cubic spinel structure, (hereafter, simply using lithium manganese oxide) is used as the positive active material. Here, a stoichiometric composition is represented by LiMn_2O_4 . However, the present invention is not restrict to lithium manganese oxide having such a stoichiometric composition, but those, in which a part of Mn, a transition element, is substituted by other one or more elements M, is also preferably used.

[0012] When a part of Mn of lithium manganese oxide LiMn_2O_4 with a stoichiometric composition is substituted by one element M, the general formula is expressed by $\text{LiM}_x\text{Mn}_{2-x}\text{O}_4$ (X represents a substituted amount). When such element substitution is carried out, the Li/Mn ratio (molar ratio) is $(1+X)/(2-X)$ in the case where Mn is substituted by Li and Li is excessive, and $1/(2-X)$ in the case where Mn is substituted by an element M other than Li. In either cases, always the Li/Mn ratio > 0.5 is held. Thus, according to the present invention, those showing the Li/Mn ratio over 0.5 are more preferably used.

[0013] When a part of Mn of lithium manganese oxide LiMn_2O_4 according to stoichiometric composition is substituted by two or more elements $\text{M}_1, \text{M}_2, \dots, \text{M}_m$, the general formula is expressed by $\text{Li}(\text{M}_1(x_1), \text{M}_2(x_2), \text{M}_m(x_m))_x\text{Mn}_{2-x}\text{O}_4$ (X represents a substituted amount; a sum of x_1 to x_n is 1). Also in this case, the Li/Mn ratio > 0.5 is held. Thus, according to the present invention, substitution of Mn by a plurality of, two or more, elements is more preferable.

[0014] The substitution element M is exemplified by Li, Fe, Mn, Ni, Mg, Zn, B, Al, Co, Cr, Si, Ti, Sn, P, V, Sb, Nb, Ta, Mo, and W. Here, of these substitution elements M, theoretically, Li becomes +1 valent, Fe, Mn, Ni, Mg, and Zn are +2 valent, B, Al, Co, and Cr are +3 valent, Si, Ti, and Sn are +4 valent, P, V, Sb, Nb, and Ta are +5 valent, and Mo and W is +6 valent ions. All these elements show a mixed crystal in LiMn_2O_4 . Co and Sn may be +2 valent, Fe, Sb, and Ti may be +3 valent, Mn may be +3 and +4 valent, and Cr may be +4 and +6 valent.

[0015] Therefore, various species of substitution element M may exist in a condition having a mixed valence. The amount of oxygen is not necessarily 4 as expressed by theoretical chemical composition and may exist in defect or excessive condition in a range of maintaining the crystal structure.

[0016] According to the present invention, lithium manganese oxide having various compositions as described above and showing characteristics, in which strength ratio (P_2/P_1 strength ratio) of a primary endothermal peak (P_1) appearing around 950°C and a secondary endothermal peak (P_2) appearing around 1100°C is under 1 in differential thermal analysis, used as the positive active material. These endothermic peaks P_1 and P_2 are considered to show a phase change of lithium manganese oxide.

[0017] The differential thermal analysis is a method to detect chemical changes accompanying thermal transfer, which occurs in a sample according to a rise in temperature, on the basis of endothermic peak and exothermic peak. Normally, the measurement is conducted simultaneously with thermogravimetric analysis by using a thermobalance.

[0018] The differential thermal analysis can be conducted in various gas atmospheres by sending a given gas to the sample or mounting the apparatus itself in a glove box. The condition of measurement of the differential thermal analysis according to the present invention is based on an air atmosphere (simply, atmosphere) under an atmospheric pressure.

[0019] Concerning lithium manganese oxide, there is, for example, a report as published on "Atsuo Yamada et al. (July, 1995) J. Electrochem. Soc. Vol. 142, No. 7, p. 2149 - 2156. Synthesis and Structural Aspects of $\text{LiMn}_2\text{O}_4 \pm \delta$ as a Negative Electrode for Rechargeable Lithium Batteries," in that various change in oxygen concentration in a measurement atmosphere allowed a change in shape of a curve yielded from the differential thermal analysis and the shift or disappearance of a

position of the endothermic peak regarded as showing the same chemical change.

[0020] If the atmosphere of the gas to be measured is not constant, the primary endothermal peak and the secondary endothermal peak cannot be defined. Therefore, the measurement in the present invention is conducted principally in an atmosphere. Meanwhile, the appearance of the primary endothermal peak and the secondary endothermal peak of the present invention are observed at least in a temperature rising process in the differential thermal analysis.

[0021] As a rule, in a case of a given rate of temperature rise of a sample in which an apex of the endothermal peak occurs at 950°C, when measurement is carried out in the rate of temperature rise lower than that of the given rate of temperature rise, the endothermal peak shifts to a higher temperature. In contrast, when measurement is carried out in the rate of temperature rise higher than the given rate of temperature rise, the endothermal peak shifts to a lower temperature. As the result of the differential thermal analysis, the rate of temperature rise should also be determined in order to define the positions of the primary endothermal peak and the secondary endothermal peak, because the position, where the endothermal peak occurs, shifts according to the rate of temperature rise in the differential thermal analysis.

[0022] Therefore, in the present invention, the primary endothermal peak is defined as an endothermal peak appearing around 950°C and the secondary endothermal peak is defined as an endothermal peak appearing around 1100°C, in the case where the temperature rising rate is 5°C/min. The term "around" is used for description in consideration of the shift in the peak position according to the temperature rising rate as described above. The condition of the peak strength ratio according to the present invention applied between two endothermal peaks appearing in the case where the temperature rising rate is 5°C/min. can be naturally applied even when endothermal peak position shifts after changing the temperature rising rate.

[0023] In the case where P_2/P_1 strength ratio, which is a strength ratio of the primary endothermal peak (P_1) and the secondary endothermal peak (P_2) measured under the given condition as described above, in other terms, a ratio yielded by dividing P_2 strength by P_1 strength, is lower than 1, a good cycle property is yielded as shown in an example described later. The peak strength is not a peak area, but a distance from a base line to the apex of the peak; more specifically, the length of a normal from the apex of the endothermal peak to a line, when the point of starting the rise of the endothermal peak is connected to the point of the end of the peak with the line.

[0024] The differential thermal analysis curve for lithium manganese oxide with 20% oxygen concentration described in "J. Electrochem. Soc." previously cited is very resemble the differential thermal analysis curve

of an example described hereinafter; the P_2 strength is almost equal to the P_1 strength. It is shown that although the conventional lithium manganese oxide showing such peak strength scarcely differs in the P_1 strength from lithium manganese oxide satisfying the requirement of the peak strength according to the present invention, there is a great difference in the P_2 strength. From the comparison of examples with Comparative Examples as described later, it is considered that lithium manganese oxide with a small P_2 strength shows a stable crystal structure and a good cycle property.

[0025] The following description is for the method of synthesizing lithium manganese oxide having thermal property as described above. Salt(s) and/or oxide(s) of respective elements (including a substituting element M in the case where element substitution is carried out) as raw materials of synthesis. The salts of respective elements are not specially restricted, but those having a high purity and requiring a low cost are preferably used as the raw materials. It is preferable to use carbonates, hydroxides, organic acid salts which generate no harmful decomposition gases in temperature rise and firing. However, nitrates, hydrochlorids, and sulfates are also usable. Among raw materials of Li, Li_2O , that is an oxide, is strongly hygroscopic and difficult to handle, and thus its chemically stable carbonate is preferably used.

[0026] A mixture of such raw materials in a given proportion is first burnt in an oxidization atmosphere, under a temperature ranging $650^\circ C$ to $1000^\circ C$ for 5 to 50 hour. Here, an oxidization atmosphere is, generally, the atmosphere having an oxygen partial pressure under which the sample in a furnace normally initiates an oxidization reaction. Specifically, the atmosphere and an oxygen atmosphere are those.

[0027] Homogeneity of the composition is not always good after the first firing. In the case where Li/Mn ratio > 0.5 is satisfied, i.e., element substitution is carried out for Mn in the stoichiometric composition, it was found experimentally that a product having a given thermal property becomes easy to yield by one firing operation particularly for a composition with excessive Li prepared by substitution of a part of Mn by Li, Ti, and Mg. The reason for it is not clear, but it is assumed that crystal structure is stabilized by the addition of the substitution element M.

[0028] As described above, a part of categories of compositions allows synthesis of lithium manganese oxide showing the given thermal property only by one firing. However, preferably, firing is separately carried out in a plurality of times in order to establish a synthesis condition not influenced by a composition.

[0029] The number of times of firing greatly depends on firing temperature and firing duration. Larger times of firing are necessary for a lower firing temperature and/or a shorter firing duration. According to species of the substitution element M, the number of

times of firing may be preferably increased in view of making an even composition. This case is that addition of the substitution element M does not allow forming phase atmosphere suitable for the growth of crystals.

[0030] However, increase in the number of times of firing requires a longer production process. Therefore, it is preferable that the number of times of firing is limited to the least necessary. In comparison with the sample yielded by firing once, the sample yielded by a plurality of times of such firing shows a sharp, projected peak on XRD chart. By this fact, improved crystallinity can be confirmed.

[0031] A firing temperature lower than $600^\circ C$ yielded a peak, e.g. the peak of Li_2CO_3 in use of lithium carbonate (Li_2CO_3) as the lithium source, showing a remained raw material on the XRD chart of the burnt matter. In this case, a monophasic product is not yielded. On the other hand, a firing temperature as higher than $1000^\circ C$ did not yield the monophasic product, but yielded a high temperature phase other than an objective crystalline compound.

[0032] In lithium manganese oxide as described above and according to the present invention, the crystal structure is stabilized and the cycle property is improved in using it as the positive active material of the lithium secondary battery. Such improved cycle property appears particularly prominent in a large capacity battery using a large quantity of electrode active material. Thus, usage thereof is exemplified by a motor actuating power source for EV and HEV. However, the present invention can be naturally used for a small capacity battery such as a coin-type battery.

[0033] Various materials so far known can be used for other member (material) used in the lithium secondary battery, in which lithium manganese oxide according to the present invention is used as the positive active material. For example, amorphous carbon materials such as soft carbon and hard carbon and highly graphitized carbon materials such as artificial graphite and natural graphite can be used as a negative active material. Among them, it is preferable to use highly graphitized carbon materials of which lithium capacity is large.

[0034] The usable organic electrolytic solutions are those in which one or more fluorine compounds of lithium complex such as $LIPF_6$ and $LiBF_4$ or lithium halogenate such as $LiClO_4$ as electrolytes are dissolved in a single solvent or a mixed solvent of such organic solvent, as carbonate esters such as ethylene carbonate (EC), diethyl carbonate (DEC), dimethyl carbonate (DMC), propylene carbonate (PC) and γ -butyrolactone, tetrahydrofurane, and acetonitrile.

[0035] The structure of the battery are exemplified by various batteries such as a coin-type battery, in which a separator is arranged between the positive active material and the negative active material molded in a plate shape to be filled with an electrolytic solution, and cylindrical and box-type batteries made by using an electrode body made by winding through the separator

or stacking around a positive plate, which is prepared by coating the positive active material over the surface of a metal foil, and a negative plate, which is prepared by coating the negative active material over the surface of a metal foil.

Examples

[0036] Subsequently, the examples of the present invention are described below. However, the present invention is not restricted to the following examples.

(Synthesis of lithium manganese oxide)

[0037] As raw materials, powder of commercially available Li_2CO_3 , MnO_2 , TiO_2 , MgO , and NiO were used, and weighed and mixed to make the composition according to the Examples 1 to 3 and Comparative Example shown in Table 1, followed by firing in an atmosphere under the conditions described in the same Table 1. The samples of Examples 1 and 3 and the Comparative Example were subjected to pulverizing process to make an average particle size to 10 μm or smaller after the first firing. Subsequently, they were burnt under the second firing conditions according to the description of the Table 1 to yield finally the sample.

[Table 1]

(Differential thermal analysis)

[0038] Differential thermal analysis of various lithium manganese oxide samples obtained was conducted by using a thermobalance named TG-DTA Thermoflex (high temperature type; made by Rigaku Denki, K.K.) under the conditions shown in Table 2. Experimental procedures were the same as normal ones applied by those skilled in the art.

[Table 2]

(Preparation of a battery)

[0039] Various lithium manganese oxide samples prepared were mixed with acetylene black powder, which is an adjuvant for electric conduction, and polyvinylidene fluoride, which is a binding agent, in a weight ratio of 50:2:3 to prepare the positive material. The positive material of 0.02 g was subjected to press molding to make a disk shape with a diameter of 20 mm under a pressure of 300 kg/cm^2 to prepare the positive. The coin cell was prepared by using this positive, the electrolytic solution prepared by dissolving LiPF_6 as the electrolyte in an organic solvent, in which ethylene carbonate and diethyl carbonate were mixed in a equal volume proportion, to make a concentration of 1 mol/L , the negative electrode made from carbon, and the separator separating the positive from the negative electrode.

(Evaluation of cycle property)

[0040] The coin cell prepared was charged up to 4.1 V applying a constant current and a constant voltage of 1C rate according to capacity of the positive active material and discharged up to 2.5 V by applying a constant current of the same 1 C rate. These charge and discharge make one cycle. The experiment was conducted for 100 cycles. The discharge capacity in the 100th cycle was divided by the first discharge capacity to yield a proportion that was used for evaluation of the cycle property. -

(Test result)

[0041] Figs. 1(a) and (b) show the results of differential thermal analyses of the Example 1 and the Comparative Example, respectively. For the respective samples, Table 3 shows the strength ratio (P_2/P_1 strength ratio) of the primary endothermal peak (P_1) to the secondary endothermal peak (P_2) and the capacity proportion to the first discharge capacity at 100 cycles. Here, for the P_2/P_1 strength ratio, the length of a normal from the apex of the endothermal peak to a line was sought by the following steps: the point of start of the rise of respective endothermal peak was connected to the point of the end of the peak with the line, this length of the line was regarded as the strength of the endothermal peak, and the P_2 strength was divided by the P_1 strength obtained to yield the P_2/P_1 strength ratio.

[Table 3]

[0042] As shown in the Table 3, the P_2/P_1 strength ratio was 1 and the discharge capacity proportion at 100 cycles was as small as 53% in the Comparative Example, pointing out a problem in the cycle property. On the other hand, as shown in the results of the Examples 1 to 3, the P_2/P_1 strength ratio was under 1 and the discharge capacity proportion at 100 cycles increased according to a decrease in the P_2/P_1 strength ratio. Thus, the cycle property was certainly improved.

[0043] Such difference in appearance of such endothermal peaks, particularly the minimal secondary endothermal peak may be due to a stabilized crystal structure to suppress release of oxygen and Li by heat. Improved cycle property by stabilized crystal structure may be based on a decrease in irreversibly changeable part of crystal structure due to moved Li ions according to charge and discharge.

[0044] In a comparison of the Examples 1 and 2 with Example 3, substitution of a part of Mn by two other elements provides prominent improvement of the cycle property than substitution by one element. Particularly, it is shown that when P_2/P_1 strength ratio was lower than 0.5, a good cycle property was obtained. Further, the comparison of the Example 1 with Example 2 shows the good cycle property in many number of times of fir-

ing even in the same composition. This may be caused by evenness of composition and improvement of crystallinity realized by increase in the number of times of firing.

[0045] As described before, the use of lithium manganese oxide spinel having a stable crystal structure, which differs in thermal property from conventional lithium manganese oxide spinel, gives an excellent cycle property to the lithium secondary battery of the present invention. In other words, the lithium secondary battery of the present invention provides a prominent effect in realizing a high capacity and a long life.

A lithium secondary battery using lithium manganese oxide as an positive active material and excellent for charge and discharge cycle property.

[0046] As an positive active material of lithium secondary battery, lithium manganese oxide having a cubic spinel structure, in which the strength ratio (P_2/P_1 strength ratio) of the primary endothermal peak (P_1) appearing around 950°C and the secondary endothermal peak (P_2) appearing around 1100°C in differential thermal analysis is under 1, is used.

Claims

1. A lithium secondary battery, characterized in that lithium manganese oxide is used as an positive active material, having a cubic spinel structure of which strength ratio (P_2/P_1 strength ratio) of a primary endothermal peak (P_1) appearing around 950°C and a secondary endothermal peak (P_2) appearing around 1100°C in differential thermal analysis is under 1.
2. The lithium secondary battery according to claim 1, characterized in that said strength ratio is under 0.5.
3. The lithium secondary battery according to claim 1 or 2, characterized in that Li/Mn ratio in said lithium manganese oxide is over 0.5.
4. The lithium secondary battery according to any one of claims 1 to 3, characterized in that said lithium manganese oxide is yielded by firing a mixture of salt(s) and/or oxide(s) of respective elements adjusted to a given proportion in an oxidation atmosphere, under a temperature in the range of 650 to 1000°C, and for a duration between 5 hours and 50 hours.
5. The lithium secondary battery according to claim 4, characterized in that said lithium manganese oxide is yielded by carrying out said firing at least twice or more.
6. The lithium secondary battery according to claim 5, characterized in that said lithium manganese oxide

is yielded by gradually increasing a firing temperature as the number of times of firing increases.

Fig.1(a)

Example 1


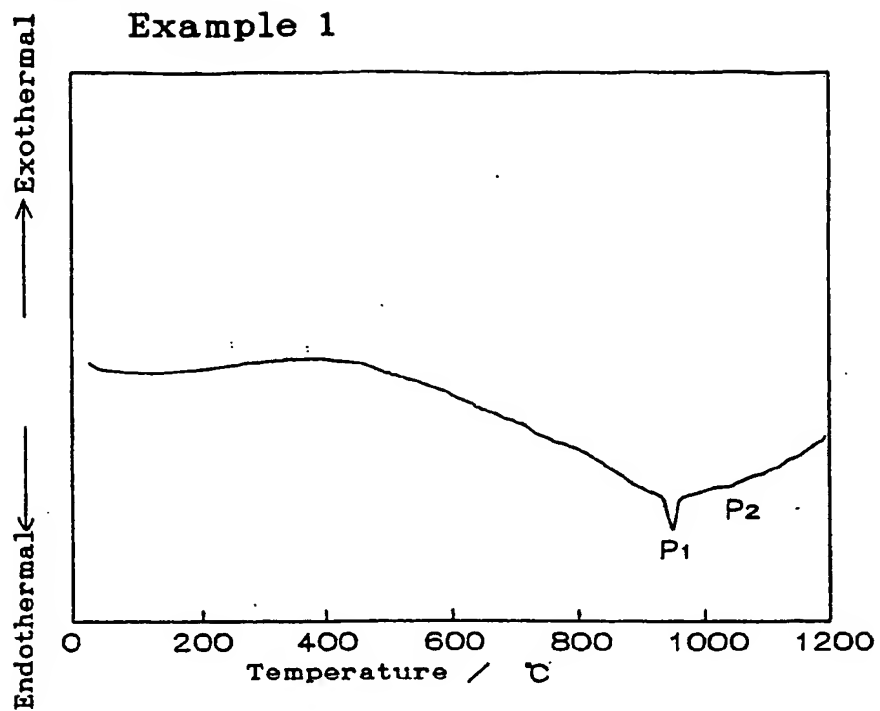


Fig.1(b)

Comparative Example



(19)

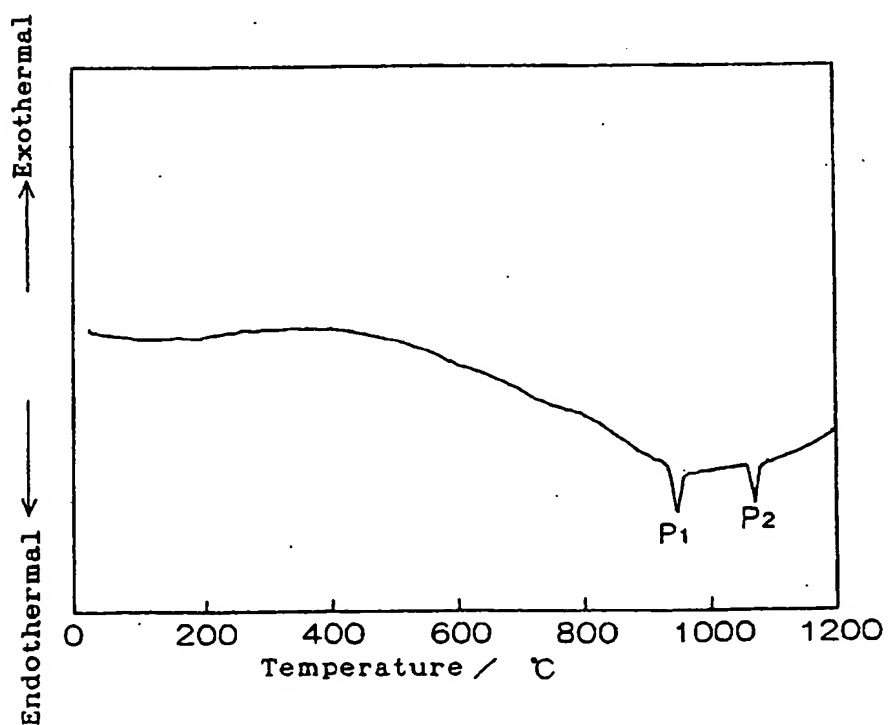

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 073 136 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
09.06.2004 Bulletin 2004/24

(51) Int Cl.7: **H01M 4/50, H01M 10/40**

(43) Date of publication A2:
31.01.2001 Bulletin 2001/05

(21) Application number: 00115415.2

(22) Date of filing: 17.07.2000

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 30.07.1999 JP 21679499

(71) Applicant: **NGK INSULATORS, LTD.**
Nagoya-City, Aichi Prefecture 467-8530 (JP)

(72) Inventor: **Takahashi, Michio, Grand-heights
Nagoya-city, Aichi-prefecture, 467-0027 (JP)**

(74) Representative:
**Leson, Thomas Johannes Alois, Dipl.-Ing. et al
Patentanwälte
Tiedtke-Bühlung-Kinne & Partner,
Bavariaring 4
80336 München (DE)**

(54) **Lithium secondary battery**

(57) A lithium secondary battery using lithium manganese oxide as an positive active material and excellent for charge and discharge cycle property.

As an positive active material of lithium secondary battery, lithium manganese oxide having a cubic spinel structure, in which the strength ratio (P_2/P_1 strength ra-

tio) of the primary endothermal peak (P_1) appearing around 950°C and the secondary endothermal peak (P_2) appearing around 1100°C in differential thermal analysis is under 1, is used.

EP 1 073 136 A3



European Patent
Office

PARTIAL EUROPEAN SEARCH REPORT

Application Number

which under Rule 45 of the European Patent Convention EP 00 11 5415
shall be considered, for the purposes of subsequent
proceedings, as the European search report

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL.7)
X	EP 0 797 263 A (MITSUBISHI CHEM CORP) 24 September 1997 (1997-09-24) Examples 9-10 and comparative Example 1 ---	1-6	H01M4/50 H01M10/40
X	US 5 425 932 A (TARASCON JEAN-MARIE) 20 June 1995 (1995-06-20) * column 3, line 57 - column 4, line 4 * ---	1-4	
X	EP 0 885 845 A (TOSOH CORP) 23 December 1998 (1998-12-23) * examples 1-5 * ---	1-4	
X	US 5 718 877 A (FAULKNER TITUS ET AL) 17 February 1998 (1998-02-17) * examples * ---	1-6	
D,X	A. YAMADA ET AL.: "Synthesis and structural aspects of Li ₂ Mn ₂ O ₄ as a cathode for rechargeable lithium batteries" J. ELECTROCHEM. SOC., vol. 142, no. 7, 1995, pages 2149-2156, XP009029674 Experimental -----	1-6	
			TECHNICAL FIELDS SEARCHED (InCL.7)
			H01M
INCOMPLETE SEARCH			
<p>The Search Division considers that the present application, or one or more of its claims, does/do not comply with the EPC to such an extent that a meaningful search into the state of the art cannot be carried out, or can only be carried out partially, for these claims.</p> <p>Claims searched completely :</p> <p>Claims searched incompletely :</p> <p>Claims not searched :</p> <p>Reason for the limitation of the search: see sheet C</p>			
Place of search		Date of completion of the search	Examiner
MUNICH		20 April 2004	Schwaller, J-M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 82 (P04.007)



European Patent
Office

INCOMPLETE SEARCH
SHEET C

Application Number
EP 00 11 5415

Claim(s) searched completely:
3-6

Claim(s) searched incompletely:
1-2

Reason for the limitation of the search:

Present claims 1-2 relate to a battery defined (inter alia) by reference to the parameter "strength ratio of a primary endothermal peak under 1".

The use of this unusual parameter in the present context is considered to lead to a lack of clarity within the meaning of Article 84 EPC since it is impossible to compare the parameter the applicant has chosen to employ with what is set out in the prior art. The lack of clarity is such as to render a meaningful complete search impossible.

Consequently, the search has been restricted to a lithium secondary battery containing a lithium-manganese oxide having a cubic spinel structure, preferably in a Li/Mn ratio over 0.5, and prepared according to the process defined in claim 4

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 00 11 5415

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-04-2004

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0797263	A	24-09-1997	JP	9259880 A	03-10-1997
			JP	9306490 A	28-11-1997
			JP	9306493 A	28-11-1997
			JP	10021914 A	23-01-1998
			JP	10188981 A	21-07-1998
			EP	0797263 A2	24-09-1997
			US	5866279 A	02-02-1999

US 5425932	A	20-06-1995	CA	2163087 A1	24-11-1994
			DE	69415011 D1	14-01-1999
			DE	69415011 T2	12-08-1999
			DK	701535 T3	30-08-1999
			EP	0701535 A1	20-03-1996
			ES	2127392 T3	16-04-1999
			JP	3164583 B2	08-05-2001
			JP	8509098 T	24-09-1996
			WO	9426666 A1	24-11-1994

EP 0885845	A	23-12-1998	CA	2240805 A1	19-12-1998
			DE	69801714 D1	25-10-2001
			DE	69801714 T2	18-04-2002
			EP	0885845 A1	23-12-1998
			JP	11071115 A	16-03-1999
			US	6168888 B1	02-01-2001
			US	6670076 B1	30-12-2003

US 5718877	A	17-02-1998	AU	1407897 A	07-01-1998
			EP	0909259 A1	21-04-1999
			JP	2000501060 T	02-02-2000
			JP	3411926 B2	03-06-2003
			WO	9748643 A1	24-12-1997
			US	5766800 A	16-06-1998

EPO FORM P4433

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82